


KMK 111

REDZ KMK111 optical probe is designed in IEC 62056-21 standard and it is compatible with all brands and types of IEC meters. The probe has DB9 Female interface for RS232 connection thus it can easily be used with handheld units with suitable interface and / or data collector devices.

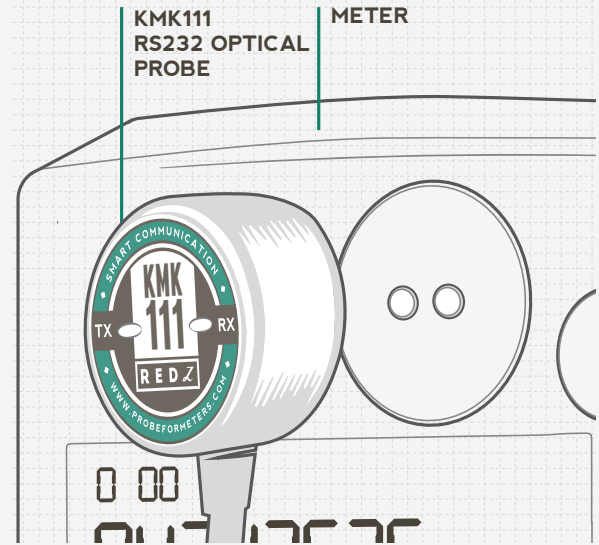

RS232 OPTICAL PROBE

INFO@PROBEFORMETERS.COM

PROBEFORMETERS.COM

REDZ
SMART COMMUNICATION



MECHANICAL SPECIFICATIONS

Diameter:	32 mm
Height:	28,5 mm
Magnetic Force:	N36
Body and Back Cover Material:	ABS
Transparent Parts:	Transparent Poly Carbonate
Weight:	~ 125 gr

ELECTRICAL SPECIFICATIONS

Standard:	IEC 62056-21 (former IEC 1107)
Cable Length:	3 m
Data Communication Speed:	max 19200 baud
Operating Voltage:	3,3 V (Passive port powered by DTR and / or RTS signals)
Electrical Interface:	RS232 DB9F
Wavelength:	~ 900 nm